





Ring 40
USA: PR059320XX




Ring 60
USA: PR059340XX

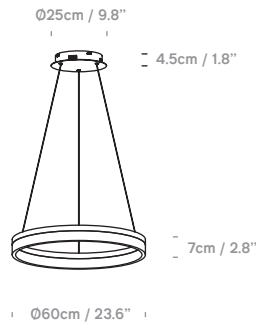


Ring 80
USA: PR059360XX

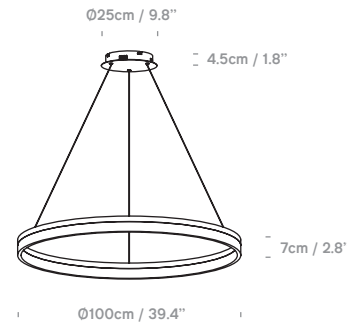

Ring 100
USA: PR059390XX

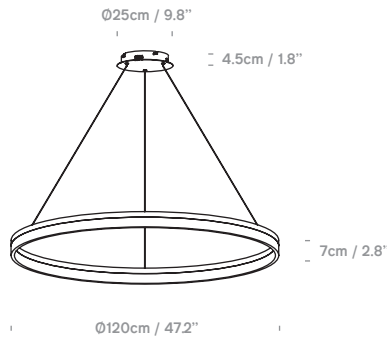

Ring 120
USA: PR059395XX

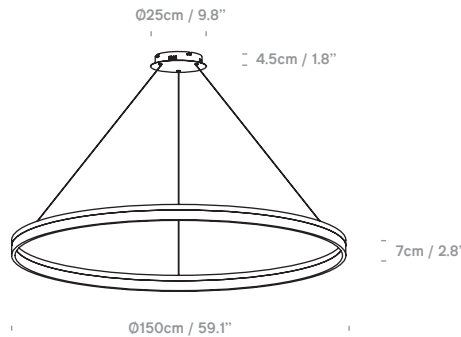

Ring 150
USA: PR059398XX

Multiple Rings in Single Pendant Available

Order Format:
Product Code A +
Product Code B + ...

Example:
Ring 100 White + Ring 80 White
= PR05939001 + PR05936001

Drop Height at 59 inches from ceiling rose and adjustable for each ring.



Colour + EAN/UPC Code

01 - White
(RAL 9003 Matt)
UPC:
40: 816827023456
60: 816827023463
80: 816827023470
100: 816827023487
120: 816827023494
150: 816827023500

02 - BLACK
(RAL 9011 Matt)
UPC:
40: 816827023395
60: 816827023401
80: 816827023418
100: 816827023425
120: 816827023432
150: 816827023449



Category	Pendant	IP Rating	IP20	LED Chip	Samsung	Other Information	
Material	Aluminium + PMMA	Product Weight	40: 4.6 lbs / 60: 5.5 lbs / 80: 7.7 lbs	Wattage	40: 15W / 60: 25W / 80: 35W	Special Order:	3500K / 4000K / 5000K, RAL colour, cable length customizable
Cable	59" Silver Suspension & Output Power Cable.	Individual Carton Size	100: 8.8 lbs / 120: 11 lbs / 150: 15.4 lbs	Luminous Flux	100: 45W / 120: 50W / 150: 60W	Energy Efficiency:	Class F
Lightsource	Integrated LED	Shipping Carton Quantity	40: 18.5x18.5x5.9in / 60: 26x26x5.9in	Colour Temp	40: 1050lm / 60: 1750lm / 80: 2450lm	LED Life:	Minimum 50,000h
Switched	No	Shipping Carton Weight	80: 35x35x5.9in / 100: 42x42x5.9in	CRI	100: 3150lm / 120: 3500lm / 150: 4200lm		
Class	cETLus Class II		120: 49.6x49.6x6.3in / 150: 61.4x61.4x6.3in	Dimmable	3000K 90+ CRI 0-10v dimming		
			100: 4KGS / 60: 6KGS / 80: 7.5KGS				
			100: 13KGS / 120: 15KGS / 150: 20KGS				